




■ Features :

- Universal AC input / Full range (up to 295VAC)
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Output voltage and constant current level adjustable
- Built-in active PFC function
- IP66 design for indoor or outdoor installations
- · Class 2 power unit
- Cooling by free air convection
- 100% full load burn-in test
- High reliability
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations

• 3 years warranty


| DC VOLTAGE | | | | | | | |
|--|--|--|--|--|--|--|--|
| | 20V | 24V | 30V | 36V | 42V | 48V | 54V |
| CONSTANT CURRENT REGION Note.5 | 13 ~ 20V | 15.6 ~ 24V | 19.5 ~ 30V | 23.4 ~ 36V | 27.3 ~ 42V | 31.2 ~ 48V | 35.1 ~ 54V |
| RATED CURRENT | 4.8A | 4A | 3.2A | 2.65A | 2.28A | 2A | 1.77A |
| CURRENT RANGE | 0 ~ 4.8A | 0 ~ 4A | 0 ~ 3.2A | 0 ~ 2.65A | 0 ~ 2.28A | 0 ~ 2A | 0 ~ 1.77A |
| RATED POWER | 96W | 96W | 96W | 95.4W | 95.76W | 96W | 95.58W |
| RIPPLE & NOISE (max.) Note.2 | 2.0Vp-p | 2.7Vp-p | 3Vp-p | 3.6Vp-p | 4Vp-p | 4.6Vp-p | 5Vp-p |
| VOLTAGE ADJ. RANGE (SVR1) | 17 ~ 22V | 22 ~ 27V | 27 ~ 33V | 33 ~ 40V | 37 ~ 46V | 43 ~ 53V | 49 ~ 58V |
| CURRENT ADJ. RANGE(SVR2) | 3.12 ~ 4.8A | 2.6 ~ 4A | 2.08 ~ 3.2A | 1.72 ~ 2.65A | 1.48 ~ 2.28A | 1.3 ~ 2A | 1.15 ~ 1.77A |
| VOLTAGE TOLERANCE Note.3 | ±3.0% | | | | | | |
| LINE REGULATION | | | | | | | |
| LOAD REGULATION | ±5.0% | | | | | | |
| SETUP TIME | 500ms / 230VAC 1200ms / 115VAC at full load | | | | | | |
| VOLTAGE RANGE Note.4 | 90 ~ 295VAC 127 ~ 417VDC | | | | | | |
| FREQUENCY RANGE | 47 ~ 63Hz | | | | | | |
| POWER FACTOR (Typ.) | PF>0.97/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve) | | | | | | |
| TOTAL HARMONIC DISTORTION | THD< 20% when output loading≧75% at 115VAC/230VAC input and output loading≧80% at 277VAC input | | | | | | |
| EFFICIENCY (Typ.) | 88% | 89% | 90% | 90% | 90% | 91% | 91% |
| AC CURRENT (Typ.) | 1.4A/115VAC | 0.7A/230VAC 0. | 5A/277VAC | · | | | |
| INRUSH CURRENT (Typ.) | COLD START 45A(twidth=85µs measured at 50% Ipeak) at 230VAC | | | | | | |
| MAX. No. of PSUs on 16A CIRCUIT BREAKER | 19 units (circuit breaker of type B) / 19 units (circuit breaker of type C) at 230VAC | | | | | | |
| LEAKAGE CURRENT | <0.75mA/240VAC | | | | | | |
| OVER CURRENT | 95 ~ 110% | | | | | | |
| | | | | | | | |
| SHORT CIRCUIT | Hiccup mode, recovers automatically after fault condition is removed | | | | | | |
| OVER VOLTAGE | 22.8 ~ 26V | 28 ~ 32V | 34 ~ 38V | 41 ~ 46V | 47 ~ 52V | 54 ~ 60V | 59 ~ 68V |
| | Protection type: Shut down o/p voltage, re-power on to recover | | | | | | |
| OVER TEMPERATURE | Shut down o/p voltage, re-power on to recover | | | | | | |
| WORKING TEMP. | -30 ~ +70°C (Refer to "Derating Curve") | | | | | | |
| WORKING HUMIDITY | 20 ~ 95% RH non-condensing -40 ~ +80°C, 10 ~ 95% RH ±0.03%/°C (0 ~ 50°C) | | | | | | |
| STORAGE TEMP., HUMIDITY | | | | | | | |
| TEMP. COEFFICIENT | | | | | | | |
| VIBRATION | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes | | | | | | |
| SAFETY STANDARDS | UL8750, CSA C22.2 No. 250.0-08(except for 48V, 54V), TUV EN61347-1, EN61347-2-13, IP66, J61347-1, J61347-2-13 approve | | | | | | |
| WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC | | | | | | |
| ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG: >100M Ohms / 500VDC / 25°C/ 70% RH Compliance to EN55015, EN61000-3-2 Class C (≧65% load) ; EN61000-3-3 | | | | | | |
| EMC EMISSION | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | , | | | | | | |
| All parameters NOT special Ripple & noise are measure Tolerance: includes set up Derating may be needed ur Please refer to "DRIVING M The power supply is consid complete installation, the fin Direct connecting to LEDs is | ed at 20MHz of batolerance, line reconder low input voll METHODS OF LE ered as a componial equipment man s suggested, but it | andwidth by using gulation and load age. Please chec D MODULE". nent that will be o nufacturers must is not suitable for | g a 12" twisted paregulation. It the static chara I perated in combine-qualify EMC Dusing additional | air-wire terminated acteristics for more nation with final edirective on the coldrivers. | with a 0.1uf & 470 e details. quipment. Since Emplete installation | uf parallel capacito MC performance v again. | vill be affected by th |
| | RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE (SVR1) CURRENT ADJ. RANGE (SVR2) VOLTAGE TOLERANCE Note.3 LINE REGULATION LOAD REGULATION SETUP TIME VOLTAGE RANGE Note.4 FREQUENCY RANGE POWER FACTOR (Typ.) TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT (Typ.) INRUSH CURRENT (Typ.) INRUSH CURRENT OVER CURRENT OVER CURRENT SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE WORKING TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION EMC IMMUNITY MTBF DIMENSION PACKING 1. All parameters NOT special 2. Ripple & noise are measure 3. Tolerance: includes set up 4. Derating may be needed ur 5. Please refer to "DRIVING N 6. The power supply is consid complete installation, the fin 7. Direct connecting to LEDs is 8. To fulfill requirements of the | RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE (SVR1) 17 ~ 22V CURRENT ADJ. RANGE (SVR2) LINE REGULATION LOAD REGULATION ETUP TIME 500ms / 230VAC VOLTAGE RANGE Note.4 VOLTAGE RANGE NOTE.097/115VAC TOTAL HARMONIC DISTORTION THD< 20% when the second secon | RATED POWER RIPPLE & NOISE (max.) Note.2 2.0Vp-p 2.7Vp-p VOLTAGE ADJ. RANGE (SVR1) 17 ~ 22V 22 ~ 27V CURRENT ADJ. RANGE (SVR2) 3.12 ~ 4.8A 2.6 ~ 4A VOLTAGE TOLERANCE Note.3 ±10% LINE REGULATION ±3.0% LOAD REGULATION ±5.0% SETUP TIME 500ms / 230VAC 1200ms / 115VA VOLTAGE RANGE Note.4 90 ~ 295VAC 127 ~ 417VDC FREQUENCY RANGE 47 ~ 63Hz POWER FACTOR (Typ.) PF>0.97/115VAC, PF>0.95/230VAC TOTAL HARMONIC DISTORTION THD CURRENT (Typ.) 88% 89% AC CURRENT (Typ.) 1.4A/115VAC 0.7A/230VAC | RATED POWER RIPPLE & NOISE (max.) Note.2 2.0Vp-p 2.7Vp-p 3Vp-p 3Vp-p VOLTAGE ADJ. RANGE (sVR1) 3.12 ~ 4.8A 2.6 ~ 4A 2.08 ~ 3.2A VOLTAGE TOLERANCE Note.3 ±10% LINE REGULATION ±5.0% SETUP TIME 500ms / 230VAC 1200ms / 115VAC at full load VOLTAGE RANGE NOTE.4 47 ~ 63Hz POWER FACTOR (Typ.) TOTAL HARMONIC DISTORTION THO ≥20% when output loading≥75% at 115VAC/2 EFFICIENCY (Typ.) 88% 89% 90% AC CURRENT (Typ.) TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) ANAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT OVER CURRENT THO ≥00 × 110% Protection type: Constant current limiting, recovers Hiccup mode, recovers automatically after fault conc 22.8 ~ 26V 28 - 32V 34 - 38V Protection type: Shut down o/p voltage, re-power on OVER TEMPERATURE WORKING TEMP. WORKING HUMIDITY 20 ~ 95% RH non-condensing TORAGE TEMP., HUMIDITY 40 ~ +80°C, 10 ~ 95% RH TEMP. COEFFICIENT ±0.03%/°C (0 ~ 50°C) VIBRATION SAFETY STANDARDS WITHSTAND VOLTAGE MICHAINSION LOSSION SETUP TO SHORT STANDARDS WITHSTAND VOLTAGE MORKING HUMIDITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, EN61000-3-2 Class C (≥68 EMC IMMUNITY Compliance to EN55015, | RATED POWER 96W 96W 95.4W RIPPLE & NOISE (max.) Note 2, 20/P-p 2.7/P-p 3/P-p 3.6V/P-p VOLTAGE ADJ. RANGE (svrn) 17 - 22V 22 - 27V 27 - 33V 33 - 40V 22 - 27V 27 - 33V 33 - 40V 22 - 27V 27 - 33V 33 - 40V 22 - 27V 27 - 33V 33 - 40V 22 - 27V 27 - 33V 33 - 40V 22 - 265A VOLTAGE TOLERANCE Note.3 ±10% 1.72 - 2.65A VOLTAGE TOLERANCE Note.3 ±10% 1.72 - 2.65A VOLTAGE TOLERANCE Note.3 ±10% 1.72 - 2.65A VOLTAGE RANGE Note.4 90 - 295VAC 127 - 417VDC VOLTAGE RANGE Note.4 90 - 295VAC 127 - 417VDC VOLTAGE RANGE Note.4 90 - 295VAC 127 - 417VDC VOLTAGE RANGE Note.4 90 - 295VAC 127 - 417VDC VOLTAGE RANGE Note.4 90 - 295VAC 127 - 417VDC VOLTAGE RANGE NOTE.4 VOLTAGE NOTE.4 VOLTAG | RATED POWER 96W 96W 95.4W 95.76W 97.76W 97. | RATED POWER 96W 96W 95.4W 95.76W 96W 96.W 95.4W 95.76W 96W 96.W 95.76W 96.W 96. |



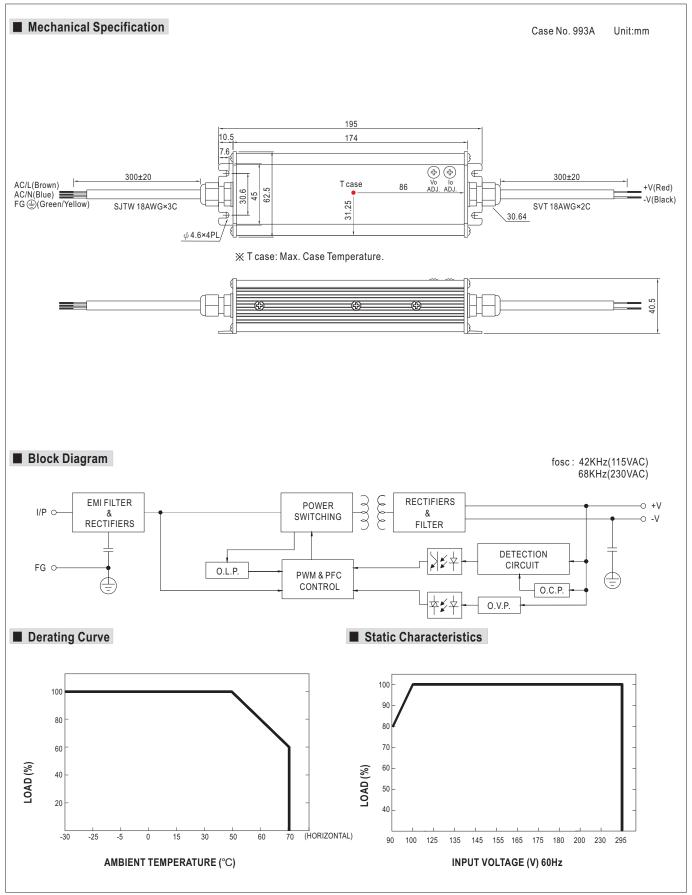




■ Power Factor Characteristic

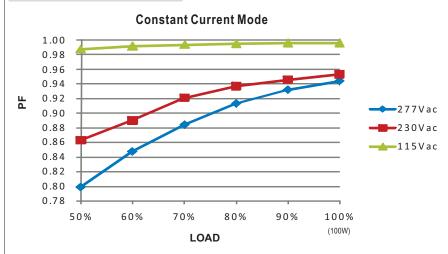


■ EFFICIENCY vs LOAD (48V Model)

CEN-100 series possess superior working efficiency that up to 91% can be reached in field applications.

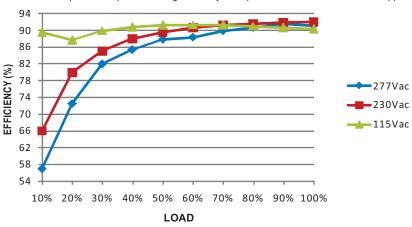

■ DRIVING METHODS OF LED MODULE

This LED power supply is suggested to work in constant current mode area (CC) to drive the LEDs.

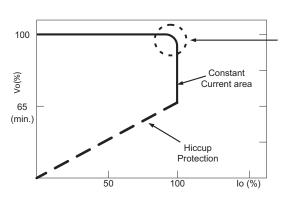

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.